



DESCRIPTIVE FEATURES

INSULATION THICKNESS 70 mm

AISI 304 STAINLESS STEEL

ROUNDED EDGES

EVAPORATOR WITH CATAPHORESIS TREATMENT

DISTANCE BETWEEN RACK RAILS 65 mm

ROUNDED AND DIAMOND-CUT BOTTOM

VENTILATED REFRIGERATION

AUTOMATIC DOOR CLOSING

TIME-CONTROLLED AND HEART PROBE CYCLES

CAPACITIVE KEYBOARD

HONEYCOMB STAINLESS STEEL TOP

ADJUSTABLE STAINLESS STEEL FEET

EASILY ACCESSIBLE MAINTENANCE COMPARTMENT

QUICK CYCLE START

ACCESSORI




ACC 141

Kit 4 Castors



ACC 135

Door Opening Left



ACC 800/4

Surcharge for EN 60X40
Trays Holder



Special voltages on
request

ROOM CONDITIONS

+40°C / 40% UR / CL 5

SPECIFICATIONS IN COMPLIANCE WITH prEN 17032

Blast Chilling (+65°C / +10°C)		Deep Freezing (+65°C / -18°C)	
Max. Capacity	Time	Max. Capacity	Time
40 kg	120 min	25 kg	260 min

CONSUMPTION (prEN 17032)

Blast Chilling	Deep Freezing
+90°C / +3°C	+90°C / -18°C
0,10 kWh/kg	0,32 kWh/kg

REFRIGERANT GAS

Type	GWP	Charge
R290	0,02	300 g

TECHNICAL DATA

 Model	ABF14.40
 Version	AIR
 Capacity	14 GN1/1 14 EN 60X40
 Blast Chilling	40 kg +90°C → +3°C 90 min
 Deep Freezing	25 kg +90°C → -18°C 240 min
 Standard tension	230 V / 1 Ph 50 Hz
 Refrigeration power	1776 W (Evap. -30°C / Cond. +45°C) 4137 W (Evap. -10°C / Cond. +45°C)
 Power consumption	3,68 kW / 16 A
 HP	3 HP
 Dimensions	800 x 730 x 1777 mm
 Noise	<70 dB
 Net Weight	190 kg
 Set-up	GN 1/1 EN 60X40

SET-UP

FLY GN 1/1 - EN 60X40




Blast chilling positive (+3°C)

Freezing (-18°C)

Positive holding (+3°C)

Negative holding (-18°C)

DIMENSIONS

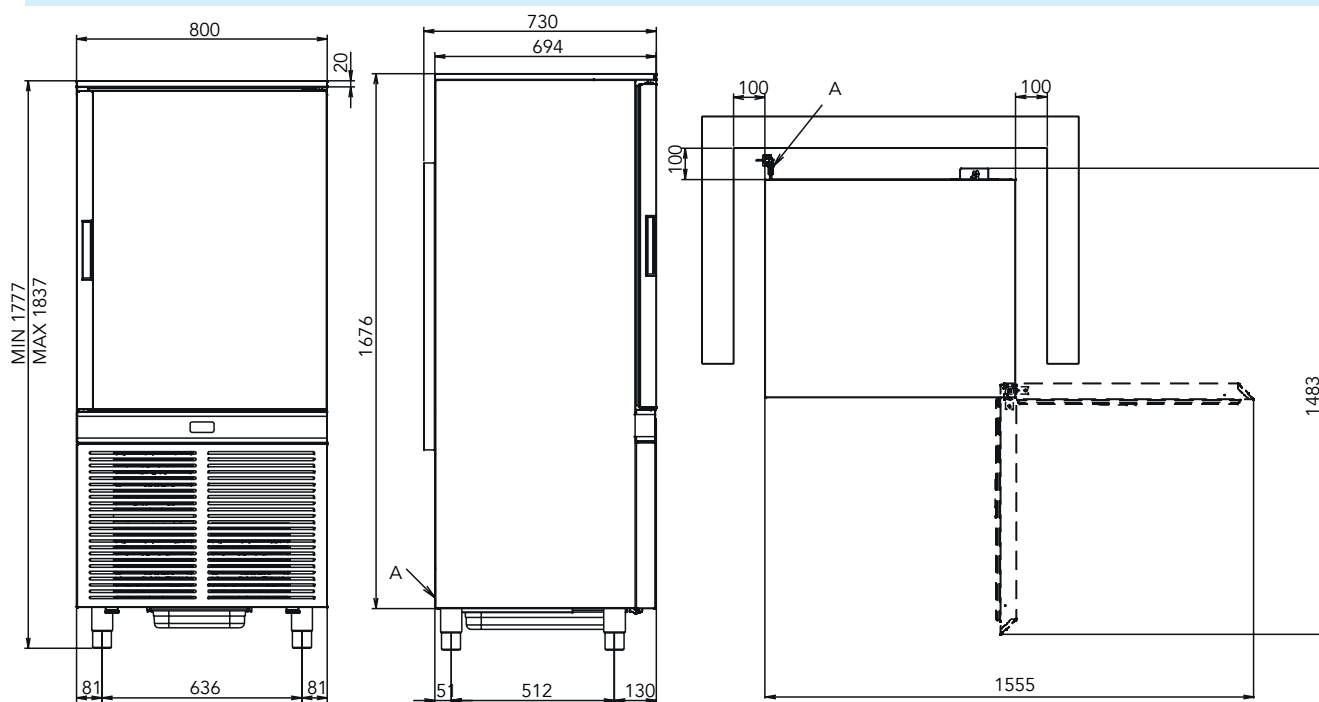

CONNECTIONS

A Electrical connection