



DESCRIPTIVE FEATURES

INSULATION THICKNESS 75 mm

AISI 304 STAINLESS STEEL

ROUNDED EDGES

EVAPORATOR WITH CATAPHORESIS TREATMENT

ROUNDED AND DIAMOND-SHAPED BOTTOM

VENTILATED REFRIGERATION

DOOR LOCK: KEY LOCK

AUTOMATIC CONDENSATE EVAPORATION


AUTOMATIC DEFROSTING

AUTOMATIC DOOR CLOSING


CAPACITIVE KEYPAD

ADJUSTABLE STAINLESS STEEL FEET


ACCESSORIES



ACC 816
Couple Runners
Stainless Steel GN 2/1




ACC 817
Couple Runners Stainless
Steel EN 60X40



ACC 214
Rilsan Covered Grill
GN 2/1



ACC T15
Kit 4 Castors



ACC 151
Led Kit



Special voltages on
request



ACC 815
Pedal

TEMPERATURE CONDITIONS

+40°C / 40% UR / Cl. 5

GAS REFRIGERANTE

Type	GWP	Charge
R290	0,02	80 g

ENERGY LABEL (GN 2/1)


ARF701B

D

TECHNICAL DATA

Model	ARF701B	ARF701BP
Version (Temp. range)	-22°C-18°C	-22°C-18°C
Max Capacity	20 Shelves pitch 60 mm	20 Shelves pitch 60 mm
Standard supplied	N.3 Guides + Grids GN 2/1	N.6 Guides EN 60X40
Trays pitch	20 mm	20 mm
Standard tension	230 V / 1 Ph 50 Hz	230 V / 1 Ph 50 Hz
Refrigeration power	651 W (Evap. -30°C / Cond. +45°C)	651 W (Evap. -30°C / Cond. +45°C)
Power consumption	1,38 W / 6 A	1,38 W / 6 A
Defrost	HOT GAS	HOT GAS
Dimensions	740 x 830 x 2130 mm	740 x 830 x 2130 mm
Net Weight	130 kg	130 kg
Set-up	GN 2/1	EN 60X40

DIMENSIONS

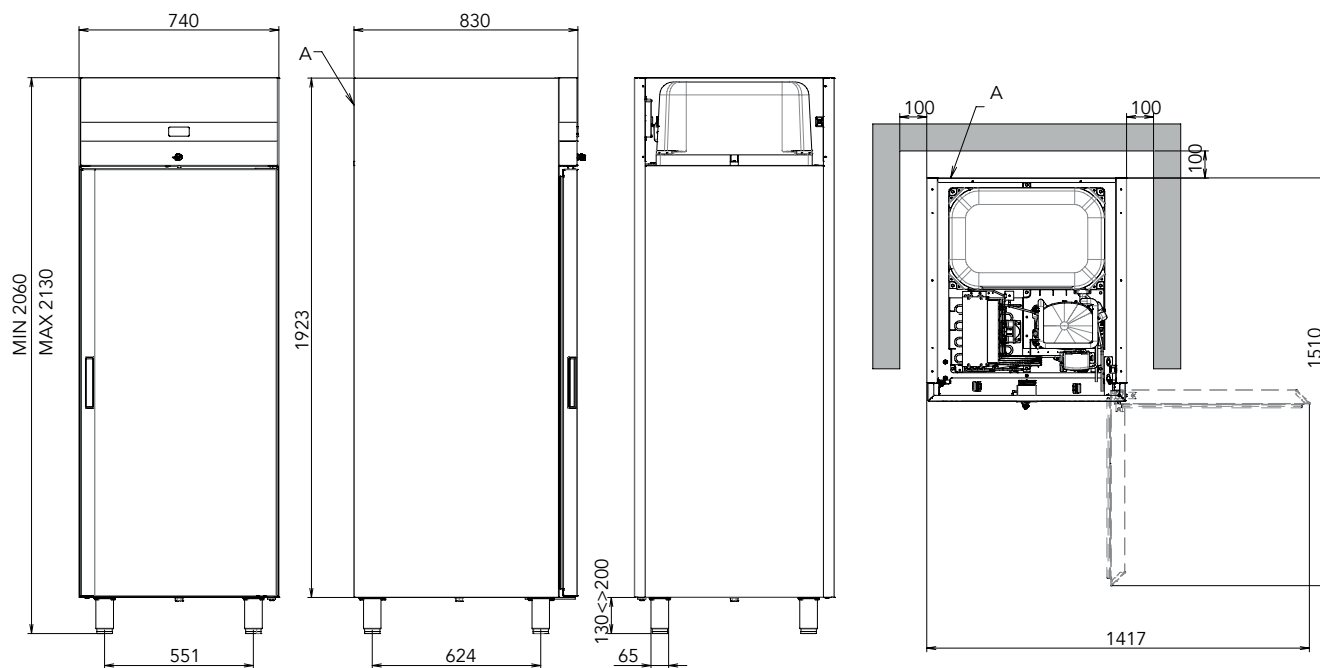

CONNECTIONS

A Electrical connection



F
L
Y