



DESCRIPTIVE FEATURES


- INSULATION THICKNESS 75 mm
- AISI 304 STAINLESS STEEL
- ROUNDED EDGES
- EVAPORATOR WITH CATAPHORESIS TREATMENT
- ROUNDED AND DIAMOND-SHAPED BOTTOM
- VENTILATED REFRIGERATION
- DOOR LOCK: KEY LOCK
- AUTOMATIC CONDENSATE EVAPORATION
- AUTOMATIC DEFROSTING
- AUTOMATIC DOOR CLOSING
- CAPACITIVE KEYPAD
- ADJUSTABLE STAINLESS STEEL FEET

ACCESSORIES


ACC 816
Couple Runners
Stainless Steel GN 2/1



ACC 817
Couple Runners Stainless
Steel EN 60X40




ACC 214
Rilsan Covered Grill
GN 2/1



ACC T15
Kit 4 Castors



ACC 151
Led Kit



Special voltages on
request



ACC 815
Pedal

TEMPERATURE CONDITIONS

+40°C / 40% UR / Cl. 5

GAS REFRIGERANTE













Type	GWP	Charge
R290	0,02	80 g

ENERGY LABEL (GN 2/1)

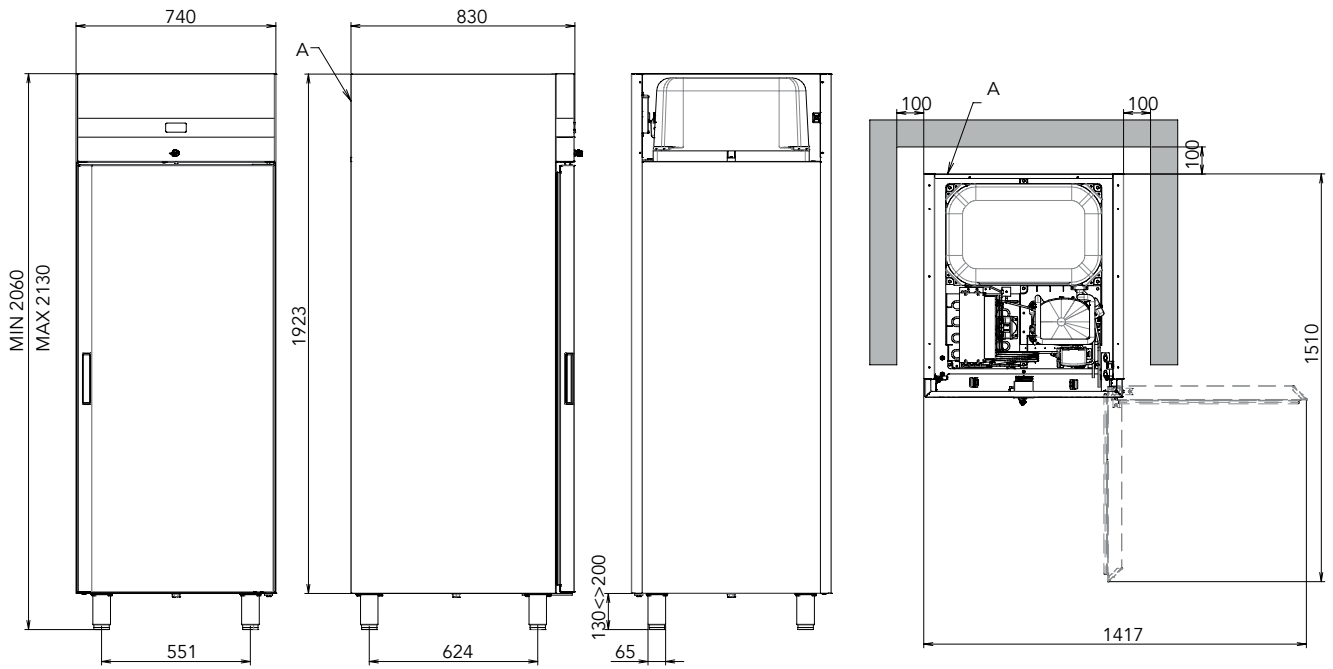
ARF701N

B

TECHNICAL DATA

	ARF701N	ARF701NP
 Model	ARF701N	ARF701NP
 Version (Temp. range)	-2°C+8°C	-2°C+8°C
 Max Capacity	20 Shelves pitch 60 mm	20 Shelves pitch 60 mm
 Standard supplied	N.3 Guides + Grids GN 2/1	N.6 Guides EN 60X40
 Trays pitch	20 mm	20 mm
 Standard tension	230 V / 1 Ph 50 Hz	230 V / 1 Ph 50 Hz
 Refrigeration power	317 W (Evap. -10°C / Cond. +45°C)	317 W (Evap. -10°C / Cond. +45°C)
 Power consumption	920 W / 4 A	920 W / 4 A
 Defrost	HOT GAS	HOT GAS
 Dimensions	740 x 830 x 2130 mm	740 x 830 x 2130 mm
 Net Weight	130 kg	130 kg
 Set-up	GN 2/1	EN 60X40

DIMENSIONS



CONNECTIONS

- A Electrical connection