



DESCRIPTIVE FEATURES

INSULATION THICKNESS 75 mm

AISI 304 STAINLESS STEEL

ROUNDED EDGES

EVAPORATOR WITH CATAPHORESIS TREATMENT

ROUNDED AND DIAMOND-SHAPED BOTTOM

VENTILATED REFRIGERATION

DOOR LOCK: KEY LOCK

AUTOMATIC CONDENSATE EVAPORATION


AUTOMATIC DEFROSTING

AUTOMATIC DOOR CLOSING


CAPACITIVE KEYPAD

ADJUSTABLE STAINLESS STEEL FEET


ACCESSORIES



ACC 816
Couple Runners
Stainless Steel GN 2/1



ACC 817
Couple Runners Stainless
Steel EN 60X40



ACC 214
Rilsan Covered Grill
GN 2/1



ACC T15
Kit 4 Castors



ACC 151
Led Kit



Special voltages on
request



ACC 815
Pedal

TEMPERATURE CONDITIONS

+40°C / 40% UR / Cl. 5

GAS REFRIGERANTE

Type	GWP	Charge
R290	0,02	80 g

ENERGY LABEL (GN 2/1)


ARF701Z

C

TECHNICAL DATA

 Model	ARF701Z	ARF701ZP
 Version (Temp. range)	0°C+10°C	0°C+10°C
 Max Capacity	20 Shelves pitch 60 mm	20 Shelves pitch 60 mm
 Standard supplied	N.3 Guides + Grids GN 2/1	N.6 Guides EN 60X40
 Trays pitch	20 mm	20 mm
 Standard tension	230 V / 1 Ph 50 Hz	230 V / 1 Ph 50 Hz
 Refrigeration power	317 W (Evap. -10°C / Cond. +45°C)	317 W (Evap. -10°C / Cond. +45°C)
 Power consumption	920 W / 4 A	920 W / 4 A
 Defrost	Compressor stop	Compressor stop
 Dimensions	740 x 830 x 2130 mm	740 x 830 x 2130 mm
 Net Weight	130 kg	130 kg
 Set-up	GN 2/1	EN 60X40

DIMENSIONS

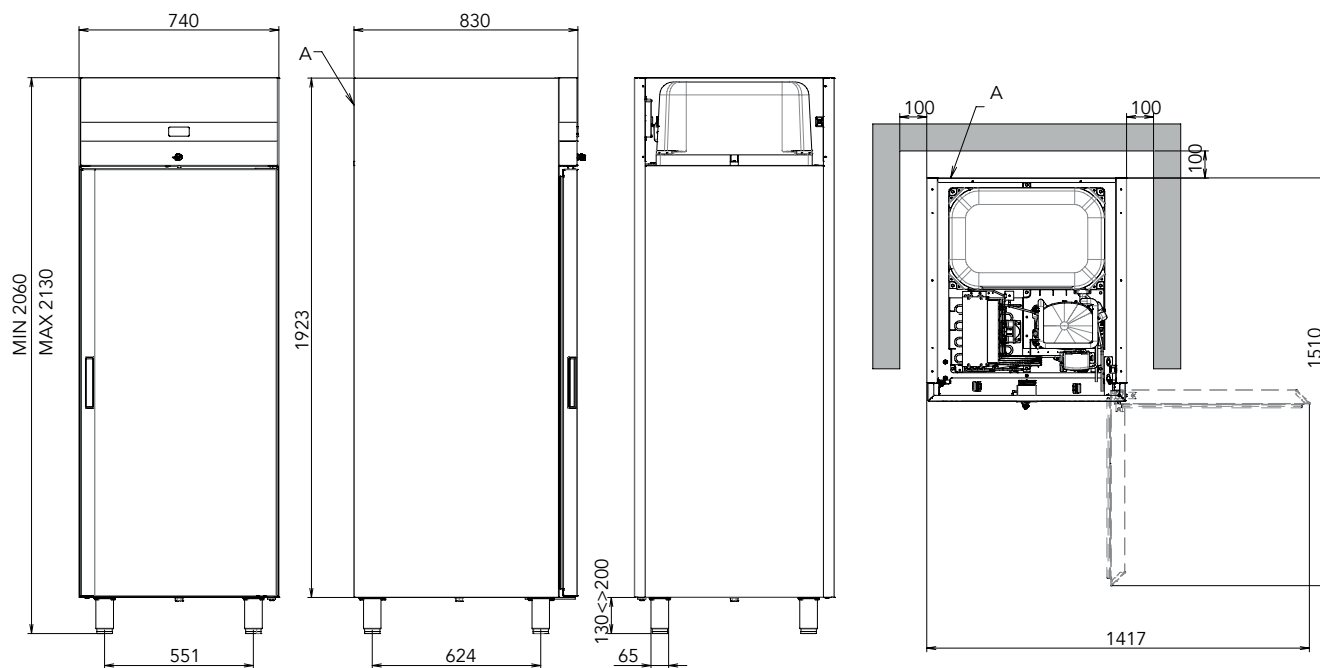

CONNECTIONS

A Electrical connection